

# 601/611 SERIES FR COVERALLS



*Shoulder pleats maximize range of movement, ensuring wearers are able to move around with more flexibility and comfort on the job.*

## SPECIFICATIONS

### Description

This updated classic provides optimal comfort, mobility and functionality, plus excellent badging flexibility. It features eight pockets and non-sparking YKK® zips throughout. YKK® press studs are covered on the inside to prevent hardware from contacting skin. Major seams are double- or triple-stitched, with stress points bar-tacked for added strength. 50mm (2") reflective FR striping on the 611 Series ensures high visibility for safety.

### Fabric

Available in a variety of fabrics to suit your working environment. See next page for more information.

### Compliance

See next page for more information.

### Colors\*

<span style="color: yellow;">■</span> Yellow (59)	<span style="color: blue;">■</span> Petro Blue (52)
<span style="color: orange;">■</span> Orange (57)	<span style="color: tan;">■</span> Tan (51)
<span style="color: red;">■</span> Red (55)	<span style="color: gray;">■</span> Graphite Gray (56)
<span style="color: navy;">■</span> Navy Blue (53)	<span style="color: lightgray;">■</span> Light Gray (76)
<span style="color: royalblue;">■</span> Royal Blue (54)	See next page for stocking information.

### Sizes\*

Short 32-70	Tall 32-70
Regular 32-70	Extra Tall 32-70

### Features


- (A) Concealed two-way, black high-density polyester coil zips with YKK® press stud closure (heavy-duty YKK® brass zip on NFPA 2112 Whole Garment Certified styles)
- (B) Two concealed chest pockets with zip closure
- (C) Oversized sleeve pocket with pen pocket divider
- (D) Two radio loops at shoulders
- (E) Shoulder pleats for 360° range of movement
- (F) Two side pockets with hidden exterior-to-interior access through pocket lining
- (G) Two back pockets, one with flap (right)
- (H) Tool pocket on right leg
- (I) Concealed YKK® press studs throughout
- (J) 50mm (2") wide reflective FR striping around arms, legs and over the shoulders (601 Series does not include reflective FR striping)

### Washing and Care instructions

#### PLEASE REFER TO GARMENT CARE LABEL

- Machine wash normal: max 60° C / 140° F
- Do not bleach
- Iron: medium heat (max 150° C / 300° F)
- Dry clean: any solvent except trichloroethylene
- Tumble dry normal: low heat

*Do not use cleaning agents containing organic soap, chlorine bleach, hydrogen peroxide or any bleaching agent. Do not use softeners or starch. Do not use acids or sour rinse.*

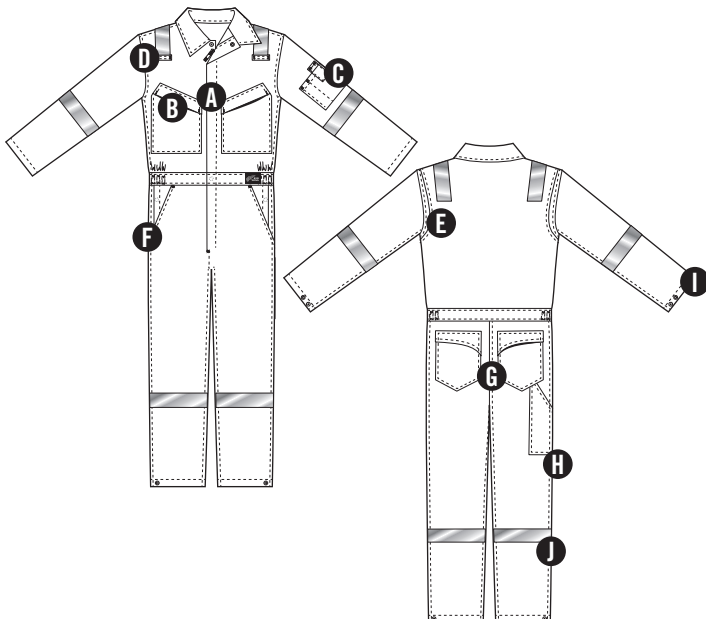

\*Stocked colors and sizes vary by location. Please confirm availability with your Red Wing representative.



# 601/611 SERIES FR COVERALLS

Fabric, Colors, Compliance

PRODUCT NUMBER	NON-REFLECTIVE	60100	60101	60111	60112	60115	60120	60121	60125	60130	60140	60145	60150	60160	60165
	REFLECTIVE	61100	61101	61111	61112	61115	61120	61121	61125	61130	61140	61145	61150	61160	61165
<b>FABRIC MATERIAL</b>															
Nomex® IIIA		•	•												
Red Wing FlashGuard®					•										
Red Wing FlashGuard® TM				•				•							
Westex™ Ultrasoft® 301									•			•			
Daletec®						•	•			•					
65% Polyester / 35% Cotton															•
60% Cotton / 40% Polyester														•	
100% Cotton											•		•		
<b>FABRIC WEIGHT</b>															
4.5 oz / 150g		•													
6 oz / 200g			•								•				•
6.5 oz / 220g				•		•		•						•	
7 oz / 235g									•			•			
7.5 oz / 250g							•								
8 oz / 270g													•		
9 oz / 300g					•										
10.5 oz / 350g										•					
<b>FABRIC COLOR*</b>															
	<b>COLOR CODE</b>														
Kiwi Green	67														
Forest Green	65														
Yellow	59														
Orange	57			•		•	•	•	•	•	•	•			•
Red	55	•		•		•	•	•	•	•	•	•			•
Navy Blue	53	•		•		•	•	•	•	•	•	•			•
Royal Blue	54	•		•		•	•	•	•	•	•	•			
Petro Blue	52										•				
Tan	51			•			•				•				•
Graphite Gray	56														
Light Gray	76						•	•	•			•			
White	61														
<b>COMPLIANCE</b>															
<b>FLAME RESISTANT</b>															
EN ISO 11612		•	•	•	•	•	•	•	•	•		•			
NFPA 2112 UL Recognized Component		•	•	•			•	•	•			•			
NFPA 2112 Whole Garment Certified		•	•				•	•				•			
Electric Arc Flash (IEC 61482-1-2)		•	•	•	•	•	•	•	•	•		•			
HRC 2 (Hazard Risk Category Rating)				•	•		•	•	•	•		•			
Anti-static (EN 1149-5)		•	•	•	•	•		•		•					



\*Stocked colors and sizes vary by location. Please confirm availability with your Red Wing representative.