

# IRD521 Accelerometer


## AC acceleration output via 2 Pin MS Connector

### Key Features

- Most common seller
- For use with data collector/ Monitoring System
- Customisable features

### Industries

Building services, Pulp and Paper, Mining, Metals, Utilities, Automotive, Water, Pharmaceutical

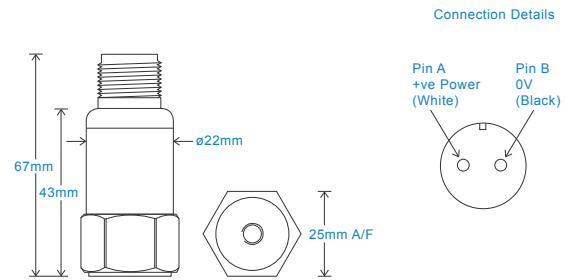

### Technical Performance

Mounted Base Resonance	see 'How To Order' table (nominal)
Sensitivity	see: 'How To Order' table $\pm 10\%$ Nominal 80Hz at 22°C
Frequency Response	2Hz (120cpm) to 10kHz (600kcpm) $\pm 5\%$ 1.5Hz (90cpm) to 12kHz (720kcpm) $\pm 10\%$ 0.8Hz (48cpm) to 15kHz (900kcpm) $\pm 3dB$
Isolation	Base isolated
Range	see: 'How To Order' table
Transverse Sensitivity	Less than 5%

### Mechanical

Case Material	Stainless Steel
Sensing Element/Construction	PZT/Compression
Mounting Torque	8Nm
Weight	125gms (nominal)
Screened Cable Assembly	contact sales@irdmech.com for options
Connector	HS-AA004 - non-booted HS-AA053 or HS-0054 - booted
Mounting Threads	see: 'How To Order' table


### Electrical

Electrical Noise	0.1mg max
Current Range	0.5mA to 8mA
Bias Voltage	10 - 12 Volts DC
Settling Time	2 seconds
Output Impedance	200 Ohms max.
Case Isolation	$>10^8$ Ohms at 500 Volts

### Environmental

Operating Temperature Range	-55 to 140°C
Sealing	IP68
Maximum Shock	5000g
EMC	EN61326-1:2013


### Typical Frequency Response (at 100mV/g)

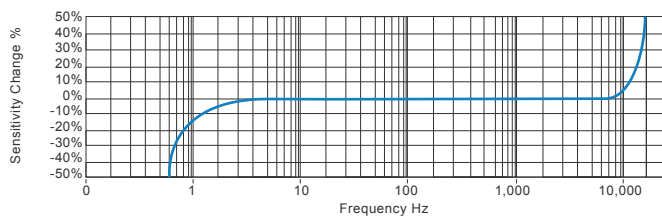

### Applications

Fans, Motors, Pumps, Compressors, Centrifuges, Conveyors, Air Handlers, Gearboxes, Rolls, Dryers, Presses, Cooling, VAC, Spindles, Machine Tooling, Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



### How To Order

Product Prefix	Product Series	Cable Length (if integral cable)												
M - IRD Mechanalysis	521 - Industrial Vibration Sensor	QXX - length specified in metres												
<b>M</b>	<b>5</b>	<b>2</b>	<b>1</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>
<b>Extra Options (if required)</b>		<b>Sensitivity</b>		<b>Range</b>		<b>Resonant Frequency</b>		<b>Cable/Connector</b>			<b>Mounting Threads</b>			
F - Filtered		010 - 10mV/g		±800g		28kHz (1,680kcpm)		01 - PUR			01 - ¼-28" UNF Female			
I - Intrinsically Safe		030 - 30mV/g		±250g		26kHz (1,560kcpm)		02 - Braided			02 - ¼-28" UNF Male			
L - 316L Stainless Steel		050 - 50mV/g		±160g		24kHz (1,440kcpm)		07 - Silicon			05 - Quick Fit Female			
RT - Temperature Output PT100		100 - 100mV/g		±80g		22kHz (1,320kcpm)		08 - Flame Retardant			06 - M6 x 1mm Male			
T - Temperature Output		250 - 250mV/g		±32g		20kHz (1,200kcpm)		50 - 2 Pin MS			08 - M8 x 1.25mm Male			
Y - 5% tolerance on sensitivity		500 - 500mV/g		±16g		18kHz (1,080kcpm)		54 - M12			10 - M10 x 1.5mm Male			

IRD Mechanalysis® Limited



www.irdmechanalysis.com  
sales@irdmech.com

We reserve the right to alter the specification of this product without prior notice  
IRD521 - May 2017

